

INSTRUCTIONS FOR USE



WINGS

Fire under control



Deployment method

Two people

Scope of application

Passenger car (internal combustion engine)

Hybrid vehicle

Electric vehicle

All activities described below must be
carried out in accordance with

SAFETY RULES,

maintaining a **proper distance**

from the burning vehicle and **avoiding inhalation**
of toxic fumes.



WARNING:


We recommend using personal protective equipment.

INSTRUCTIONS FOR USE


(**NOTE:** All activities described below must be performed by **two people.**)



1. Grab the handles marked in yellow. Carry the **PG-001 fire blanket** (in its cover) close to the burning vehicle **from the windward side**.

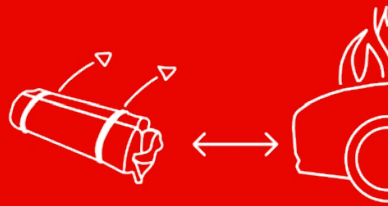

2. Open the **top fastening of the cover**. Hold the two lower handles (front and back) and lift the bag to **slide out the blanket**, then place the cover aside.

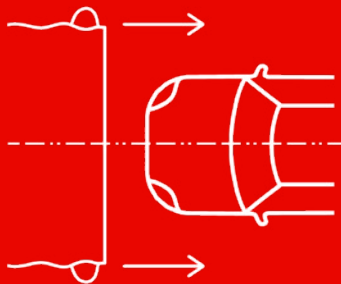

3. Lay out the blanket so that the yellow handles are facing away from the vehicle. **Remove the securing strap**, then unfold the fire blanket at a **safe distance** from the burning vehicle. **The red triangle indicates the center**. Grab the yellow handles and stretch the blanket over the vehicle, ensuring it is **properly tensioned**. Make sure to maintain the **symmetry axis** of the blanket relative to the vehicle's axis and watch out for any **sharp protruding elements** of the vehicle (they may damage the blanket).

INSTRUCTIONS FOR USE

(**NOTE:** All activities described below must be performed by **two people.**)



4. Ensure that the fire blanket **firmly adheres to the ground**. This prevents further spread of the fire, reduces risk, and **increases the safety** of those involved in the firefighting operation.



5. The **removal of the fire blanket** from the vehicle should only take place after the arrival of **specialized firefighting units** and once it has been confirmed that there is no risk of the fire reigniting. The blanket may be removed in any manner; however, this should be carried out by **trained professionals**.



6. After extinguishing the fire, lay the blanket out with the **inner side facing up**. Carefully remove loose debris from the vehicle (by hand or using a stream of water). Do not remove elements that are **permanently stuck**. In case of damage or permanent contamination, **inspection by an authorized service center is recommended**.


FOLDING PROCEDURE

(**NOTE:** All activities described below must be performed by **two people.**)



1. Blanket layout and positioning of users

Spread the blanket evenly on a flat surface, with the **matte side facing outward** (marked "TOP"). Stand on opposite sides of the blanket, along the longer edges, approximately **80–90 cm from the ends** marked by the red handles. Hold the blanket with one hand at these points.

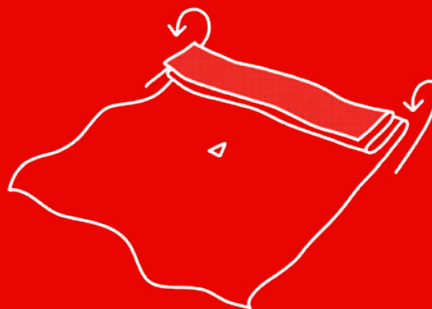


2. Folding the blanket

Grip the blanket every **80–90 cm** and gradually fold it lengthwise until a shorter section marked with yellow handles remains. Fold this section so that the **shiny side faces upward**, ensuring that all red handles are tucked inside.


FOLDING PROCEDURE

(**NOTE:** All activities described below must be performed by **two people.**)

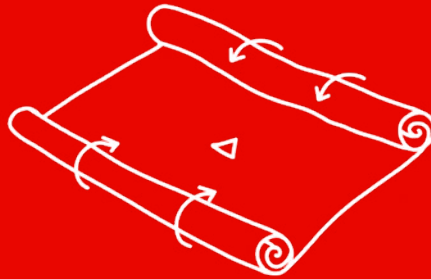

3. Rolling the blanket

Pull the yellow handles outward and roll the blanket from both sides **towards the red triangle in the center**. Then place **the red securing strap** in the middle of the roll and position the blanket vertically.

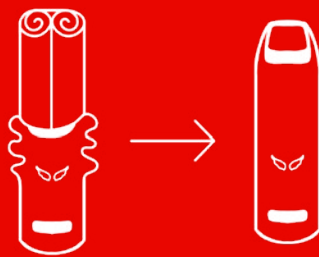

4. Putting on the cover

Slide the cover onto the blanket, then lay it flat. Lift the cover into a vertical position with the fastening at the top, using the yellow handles. Finally, fold over the black flap and fasten the **black buckle**.



CONTACT US :

PM3D SA

☎ 725168000

✉ contact@e-wings.pl

📍 ul. Fordońska 2, 85-085 Bydgoszcz

🌐 www.e-wings.pl

KRS: 0000494819

NIP: 8762459770



Fire Blanket
for electromobility



Fire Blanket
for industry



Fire Blanket
for electric cars



Fire Blanket
for fuel cars

